



Philips SILHOUETTE™
Series T5 HO Long Life
Lamps featuring ALTO®
Lamp Technology

*Ideal for medium-bay
and high-bay retail and
industrial applications*

SILHOUETTE™ SERIES



† This lamp is better for the environment because of its reduced mercury content. All Philips ALTO® lamps give you end-of-life options which can simplify and reduce your lamp disposal costs depending on your state and local regulations.

Powerful, ultra-slim lamps

Philips SILHOUETTE™ Series T5 HO Long Life lamps are environmentally-responsible, ultra-slim and have extraordinary light output and longer life.

Reduced maintenance and disposal costs

- Long life for an extended relamping cycle
- 35,000 hours rated average life¹
- Warranty period: 36 months

Slim profile lamp and ballast

- Design flexibility
- Improved optical control

Increased light output

- Up to 70% more lumens than standard SILHOUETTE Series T5 lamps
- 95% lumen maintenance

Sustainable lighting solution

- Reduces the impact on the environment: low mercury, energy efficiency, long life, and less material

(¹ See back of page for footnotes)

PHILIPS
sense and simplicity

Philips SILHOUETTE™ Series T5 HO Long Life lamps featuring ALTO® Lamp Technology

Ordering, Electrical and Technical Data

Product Number	Description	Nom. Watts	Pkg. Qty.	Color Temp. (Kelvin)	Nom. Length (In.)	Rated Average Life (Hrs.) ²		Approx. Initial Lumens ^{4,5}	Design Lumens ⁶	CRI	Lumen Maint.
						3-hr Start ³	12-hr Start ¹				
ⓔ 29026-2	F54T5/830/HO/ALTO	54	40	3000	46	25,000	35,000	5000	4750	85	95%
ⓔ 29028-8	F54T5/835/HO/ALTO	54	40	3500	46	25,000	35,000	5000	4750	85	95%
ⓔ 29083-3	F54T5/841/HO/ALTO	54	40	4100	46	25,000	35,000	5000	4750	85	95%
ⓔ 13510-3	F54T5/850/HO/ALTO	54	40	5000	46	25,000	35,000	4850	4625	85	95%
ⓔ 14745-4	F54T5/865/HO/ALTO	54	40	6500	46	25,000	35,000	4750	4500	85	95%

- 1) Average life under engineering data with lamps turned off and restarted once every 12 operating hours.
 - 2) Rated average life is the length of operation (in hours) at which point an average of 50% of a large sample of lamps will still be operational and 50% will not.
 - 3) Average life under specified test conditions with lamps turned off and restarted no more frequently than once every 3 operating hours. Lamp life is appreciably longer if lamps are started less frequently.
 - 4) Approximate initial lumens. The lamp lumen output is based upon lamp performance after 100 hours of operating life, when the output is measured during operation on a reference ballast under standard laboratory conditions.
 - 5) For expected lamp lumen output, commercial ballast manufacturers can advise the appropriate ballast factor for each of their ballasts when they are informed of the designated lamp. The ballast factor is a multiplier applied to the designated lamp lumen output.
 - 6) Design lumens are the approximate lamp lumen output at 40% of the lamp's rated average life. This output is based upon measurements obtained during lamp operation on a reference ballast under standard laboratory conditions.
- ⓔ Lamp meets US Federal Minimum Efficiency Standards.


Save up to 100 Watts when you upgrade to a 6 lamp T5HO System from a MH400 or MS360 HID System

kWh Rate	Energy Costs Based on Annual Operating Hrs [⊙]				Energy Savings with 100 Fixtures		Energy Costs Based on Annual Operating Hrs [⊙]				Energy Savings with 100 Fixtures	
	MH400 460 System Watts		T5 54W HO 360 System Watts		T5 54W HO vs. MH400 [†]		MS360 420 System Watts		T5 54W HO 360 System Watts		T5 54W HO vs. MS360 ^{††}	
	4380*	8760**	4380*	8760**	4380*	8760**	4380*	8760**	4380*	8760**	4380*	8760**
\$0.06	\$120.89	\$241.78	\$94.61	\$189.22	\$2,628	\$5,256	\$110.38	\$220.75	\$94.61	\$189.22	\$1,577	\$3,154
\$0.08	\$161.18	\$322.37	\$126.14	\$252.29	\$3,504	\$7,008	\$147.17	\$294.34	\$126.14	\$252.29	\$2,102	\$4,205
\$0.10	\$201.48	\$402.96	\$157.68	\$315.36	\$4,380	\$8,760	\$183.96	\$367.92	\$157.68	\$315.36	\$2,628	\$5,256
\$0.12	\$241.78	\$483.55	\$189.22	\$378.43	\$5,256	\$10,512	\$220.75	\$441.50	\$189.22	\$378.43	\$3,154	\$6,307
\$0.20	\$402.96	\$805.92	\$315.36	\$630.72	\$8,760	\$17,520	\$367.92	\$735.84	\$315.36	\$630.72	\$5,256	\$10,512


- ⊙ Energy cost based on: (annual operating hours x kwh rate x system watts) ÷ 1,000
 * Based on 4,380 annual operating hours (12 hours per day/7 days per week)
 ** Based on 8,760 annual operating hours (24 hours per day/7 days per week)
 † Energy savings based on: (costs of MH400 - cost of T5 54W HO) x 100 fixtures.
 †† Energy savings based on: (cost of MS360 - cost of T5 54W HO) x 100 fixtures.

Above specifications subject to change without notice.

95% Lumen Maintenance SILHOUETTE™ Series T5 HO Long Life

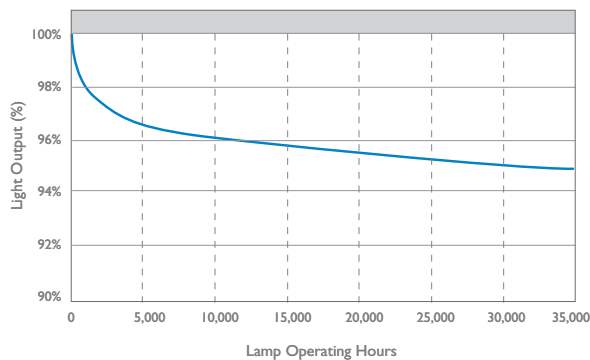

Lumens vs. Ambient Temperature SILHOUETTE™ Series T5 HO Long Life

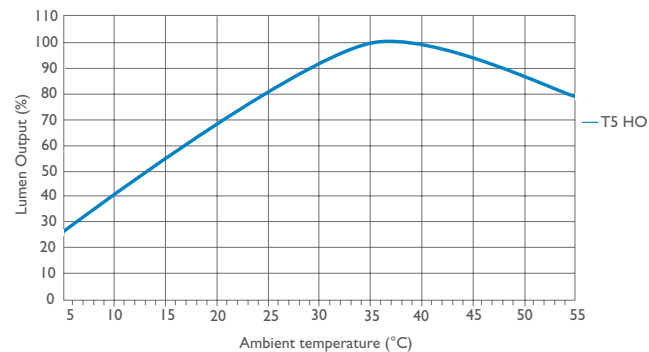

Specifications are subject to change without notice.
 © 2007 Philips Lighting Company. All rights reserved.
 Printed in USA 08/07
 P-5752-C
www.philips.com

Philips Lighting Company
 200 Franklin Square Drive
 P.O. Box 6800
 Somerset, NJ 08875-6800
 1-800-555-0050
 A Division of Philips Electronics North America Corporation

Philips Lighting
 281 Hillmount Road
 Markham, Ontario
 Canada L6C 2S3
 1-800-555-0050
 A Division of Philips Electronics Ltd.

Printed on chlorine free paper from Sappi Fine Paper mills, who are accredited with EMAS environmental certification. Sappi claims that the pulp used in the manufacture of Magno Dull paper is derived from environmentally certified forests.